


CL-S700

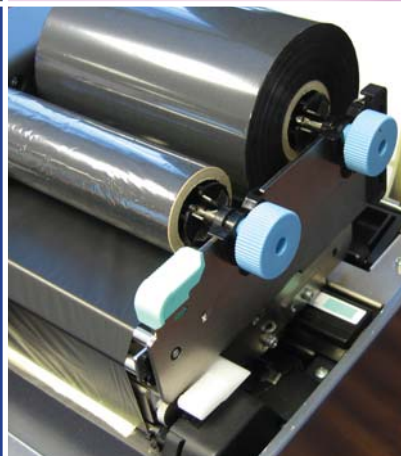

High Performance with Easy Access

A new line of barcode label
printers printing at up to 10 ips

CITIZEN
Micro HumanTech

Front Loading - Easy Access

All Citizen label and barcode printers are designed with ease of use in mind and our new CL-S700 range of printers is no exception. In fact, we believe we have exceeded even our own high standards with our latest design.

All the standard operations are accessible from the front of the printer meaning no need to reach down the side of the printer to install media, and saving valuable desk space. Our internal rewinding version features the simplest rewinder system ever designed, once again with front loading access for ease-of-use and minimum footprint.

Industrial Strength - Simple Design



Naturally, an industrial strength printer comes in a heavy duty metal enclosure to ensure reliable and uninterrupted operation.

A media viewing window on the top allows a user to quickly see the amount of ribbon or labels remaining and the top case opens fully for unrestricted access and closes gently for both user safety and user courtesy.

Quick-Change Ribbons - Flexible Media

Our CL-S700 printers all feature Citizen's Hi-Lift™ metal printhead mechanism which tips completely to one side to give the best access to both the media path and ribbon loading.



Ribbon changing takes seconds, rather than minutes: if you have only used *other* barcode printers, you will not believe how easy a Citizen printer is to operate.

Our ARCP system - Active Ribbon Control & Positioning - completely eliminates ribbon wrinkle and media slippage on small or specialist media.

Simple Control - Flexible Connectivity

With simple operation in mind, we made sure the control panel is clear, bright and easy to use. Operation for day-to-day functions is very simple and backed up by an extremely powerful menu system for *power users*.

Standard connectivity is by parallel, serial and USB interfaces and optional Ethernet and Wireless LAN cards can be installed, even by a user.

For More Information - Contact Us

Citizen Systems Europe GmbH
www.citizen-europe.com

Mettinger Strasse 11,
 D-73728 Esslingen, Germany
 Tel: +49 711 3906 420
 Fax: +49 711 3906 405

Park House, 643-651 Staines Rd,
 Feltham. TW14 8PA, UK
 Tel: +44 20 8893 1900
 Fax: +44 20 8893 0080

CL-S700

	Technical Specification
Technology	Thermal Transfer & Direct Thermal
Resolution	203 dpi (8 dots / mm)
Max Print Speed	10 inches / sec, 254 mm / sec
Max Print Width	4.10 inches, 104.1 mm
Max Media Width	4.65 inches, 118.1 mm
Min Media Width	1.00 inches, 25.4 mm
Max Roll Size	8 inches, 200 mm outside diameter
Min Core Size	1 inch, 25mm core
Media Sensor	Fully adjustable
Media Thickness	0.0025 - 0.01 inches, 0.635 - 0.254 mm
Ribbon Size (Diameter & Length)	3.3 inches, 84 mm (Nominally 450m length)
Ribbon Winding	Ink side in or out, automatically sensing
Ribbon Type	Wax, Wax/Resin or Resin Type
Ribbon System	ARCP™ automatic ribbon tension adjustment
Standard Interfaces	Parallel (IEEE-1284) Serial (RS-232C) USB (version 2.0)
Optional Interfaces	Ethernet (10/100 BaseT) Wireless LAN (802.11g)
Case Type	Hi-Open™ metal case with soft-close
Mechanism Type	Hi-Lift™ mechanism with 90° opening
Control Panel	4-line graphic LCD and 4 buttons
RAM Memory	8 Mb total, 0.5 Mb available for user
Flash (NV) Memory	2 Mb total, 0.5 Mb available for user
Windows® drivers	Free-of-charge on CD with printer
Label Design Software	Including support for Windows® Vista™
Size (W x D x H)	Standard model: 255 x 480 x 253 mm Rewinder model: 255 x 480 x 386 mm
Weight (approx)	Standard model: 13.5 Kg Rewinder model: 18.5 Kg
Warranty	2 Year Manufacturers Warranty Printhead: 50 Kms or 6 months

Provisional Information

This information is subject to change without notice and should be used for reference only. Errors & omissions excluded.

Contact Citizen for the latest details and most up-to-date information.